

FEATURES:

Cast brass construction

SIDE VIEW - INSTALLED

- Thermostatic valve cartridge with cover plate: 18.30.147
- Thermostatic reverse cartridge with cover plate: 18.30.161
- 14.28 GPM @ 56 PSI top exit & 11.10 GPM bottom exit
- Meets: ASME A112.18.1/CSA B125.1-2011


NOTE: Separate shut offs required to operate system.


Specifications

3/4" Thermostatic with Integral Stops

Valve & Trim Boredeaux Handle

1.006497D (1.006497DT Trim Only)

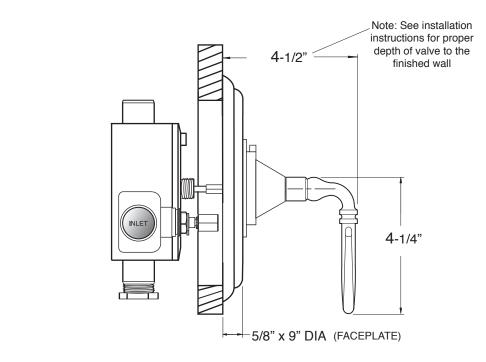

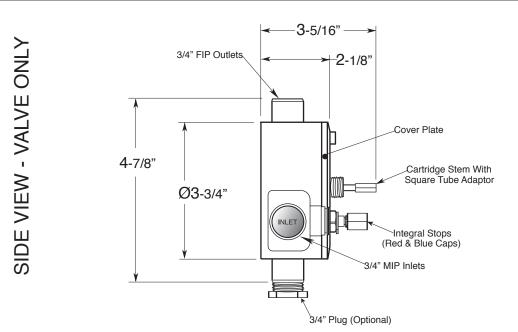

Note: Measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.