

Specifications

FEATURES: STIXX HANDLE


· All brass construction.

· Euro-style 20pt handle.

· Available in all finishes. Warranty varies according to finish selection.

 Certified to meet or exceed the following codes and standards: ASME A112.18.1/CSAB 125.1-2012. In-Wall Trim

1.009587T

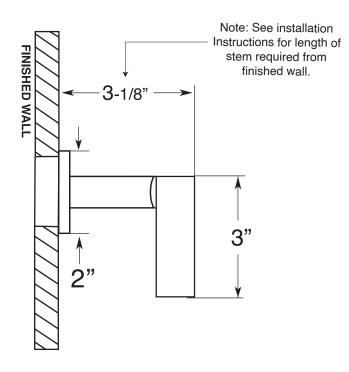

Valve Options:

78.30.020 - 1/2" Volume Control - Replacement Cartridge: 18.30.036 78.30.023 - 3/4" Volume Control - Replacement Cartridge: 18.30.011

Diverter (Positive Shut-off):

78.30.255M - 3 Port In-Wall Diverter - Replacement Cartridge: 18.30.90378.30.253 - 4 Port In-Wall Diverter - Replacement Cartridge: 18.30.257

Trickle Flow (For Pressure Balance Only):

78.30.254M - 3 Port In-Wall Diverter - Replacement Cartridge: 18.30.898 78.30.252 - 4 Port Diverter - Replacement Cartridge: 18.30.256

Note: Measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.