

TechData SPECIFICATIONS Nouveau

FEATURES:

- All brass construction.
- Available in True Stainless Steel only
- Thermostatic valve cartridge: 18.30.082
- Screw driver spring check valve: (2) 18.30.181
- 14.5 GPM @ 45PSI (9.5 top exit / 5.0 bottom exit)
- Certified to meet or exceed the following codes and standards:
ASME A112.18.1/CSAB 125.1-2011

1/2" Thermostatic Valve
and Trim


7.0509096

True Brushed Stainless Steel


(7.0509096T Trim Only)

Note: Separate shut-offs required to operate system

SIDE VIEW - INSTALLED

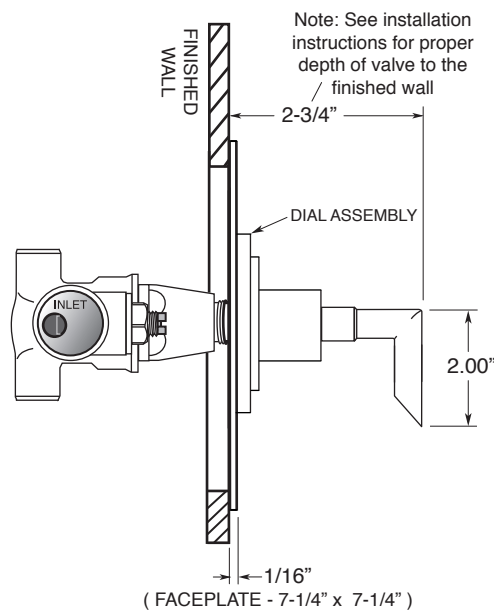

SIDE VIEW - VALVE ONLY

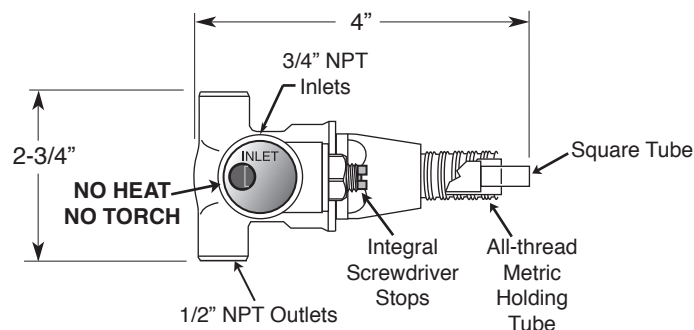

Note: Measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.