
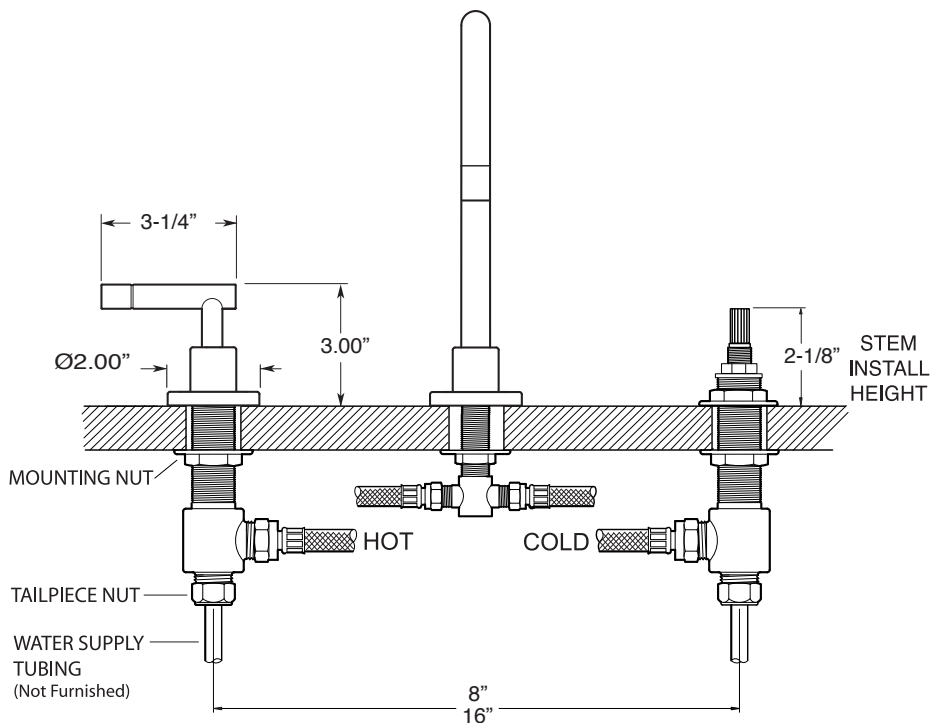


- All brass construction. Flexible hoses designed to be installed on 8" to 16" centers. Includes soft touch drain assembly. P/N 18.11.052
- Lever style handles with inside screw attachment.
- 20 PT. 1/4-turn ceramic disc valve cartridge.
- Available in all finishes. Warranty varies according to finish selection.
- Standard aerator is limited to 1.2 gpm.
- Certified to meet or exceed the following codes and standards: ASME A112.18.1/CSAB 125.1-2012

## 3400 Series Widespread Lavatory Set with Short Spout and Polaris II Handle

Technical drawing of a curved metal spout. The drawing shows a side view of the spout, which is curved upwards and then downwards. The dimensions are as follows:

- The overall width of the spout is  $6-7/16"$ .
- The height of the spout from the base to the top of the curve is  $8"$ .
- The height of the spout from the base to the bottom of the curve is  $4"$ .
- The diameter of the spout is  $\varnothing 2.00"$ .
- The base of the spout is shown with a cross-hatched pattern, indicating it is a solid material.
- The text "1-1/4" max. deck thickness - Spout" is located at the bottom right of the drawing.



NOTE: Spout and valves install through 1-1/4" diameter holes

American Faucet &amp; Coatings Corporation