

**SPECIFICATIONS**

**Butler Mill**

**1/2" Exposed Thermostatic Shower Set with Diverter & Handshower Cross Handle**


1.0098910

**FEATURES:**

- All brass construction.
- Available in all finishes. Warranty varies according to finish selection.
- Thermostatic valve cartridge P/N: 18.30.300
- Volume control cartridge P/N: 18.30.195
- Certified to meet or exceed the following codes and standards:  
ASME A112.18.1/CSAB 125.1-2011

\*\*\*\*\*

- Installation height from floor to center of valve to be determined by homeowner or installer.
- Do not rough-out without copper rough-in template. Guide will be sent ahead upon request.

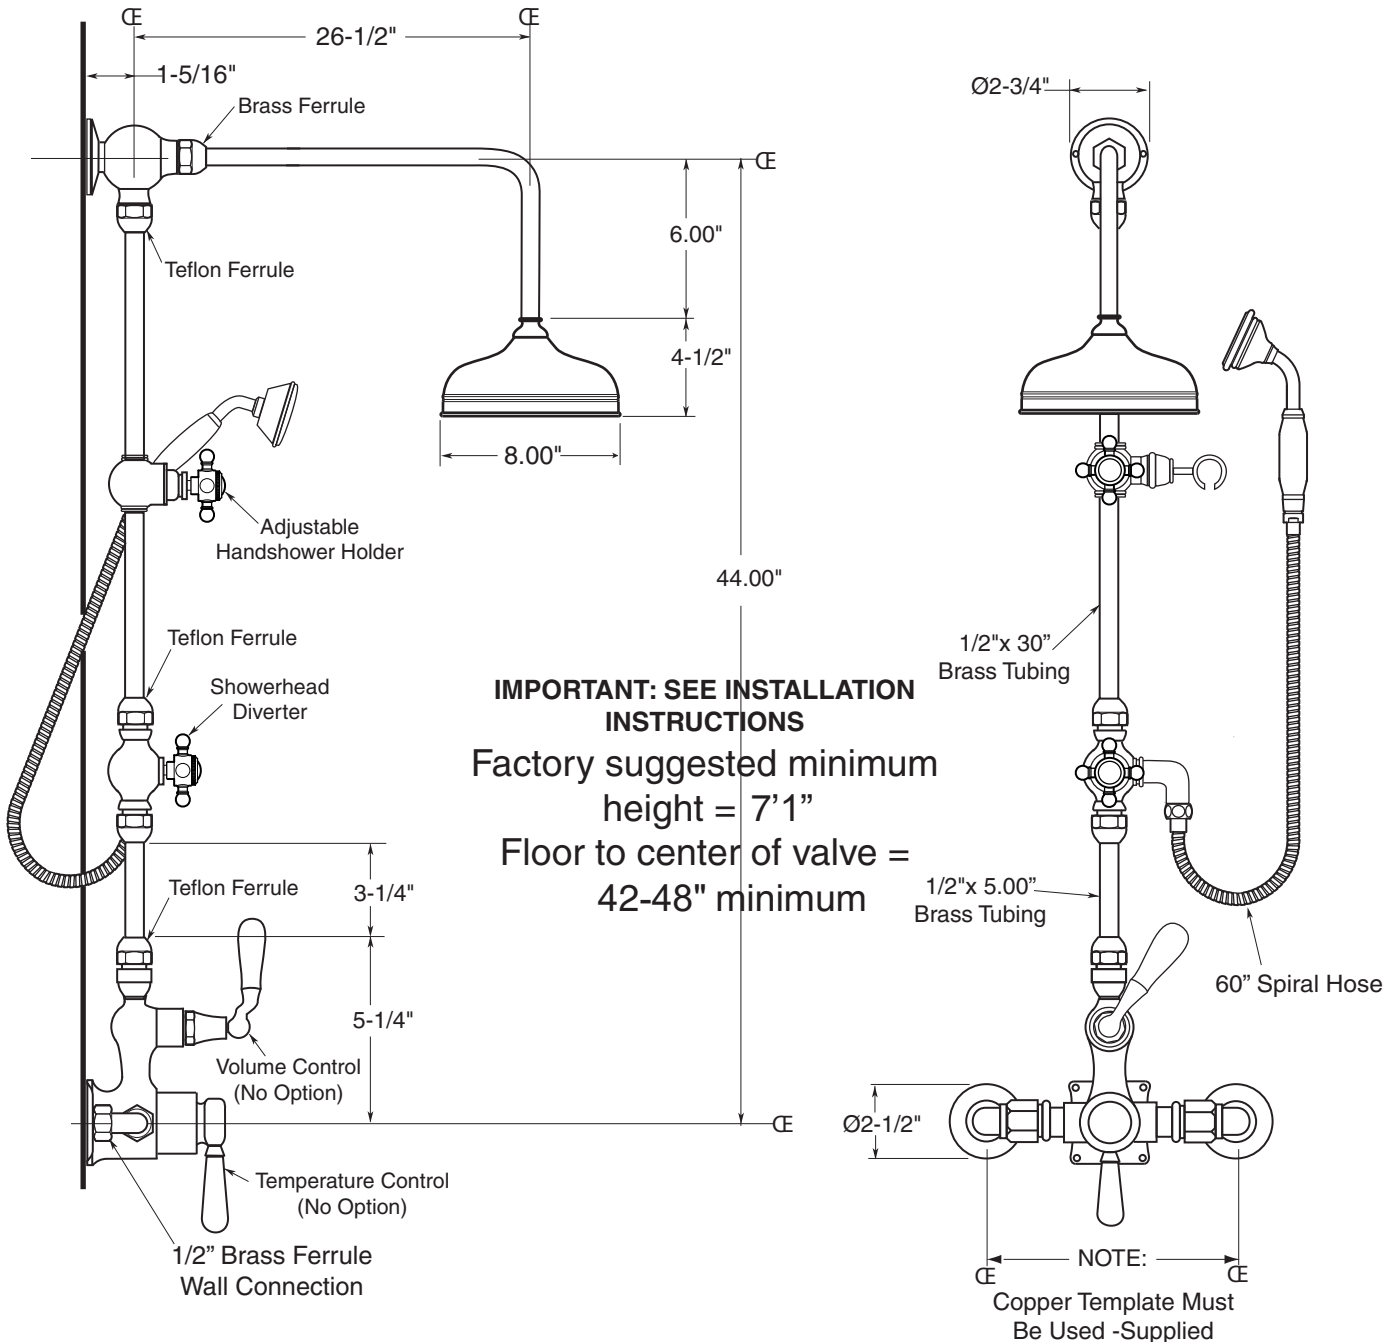

**IMPORTANT: SEE INSTALLATION INSTRUCTIONS**  
Factory suggested minimum height = 7'1"  
Floor to center of valve = 42-48" minimum

Note: Measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.