




FEATURES:

- All brass construction. Flexible hoses designed to be installed on 8" to 16" centers. Includes soft touch drain assembly.
- Square escutcheon with square flared handles.
- 1/4-turn ceramic disc valve cartridge.
- Available in all finishes. Warranty varies according to finish selection.
- Flow restrictor in spout tee is limited to 1.2 gpm.
- Certified to meet or exceed the following codes and standards: ASME A112.18.1/CSAB 125.1-2011

SPECIFICATIONS

1600 Series Widespread Lavatory Set with Nuance Handles

1.163808

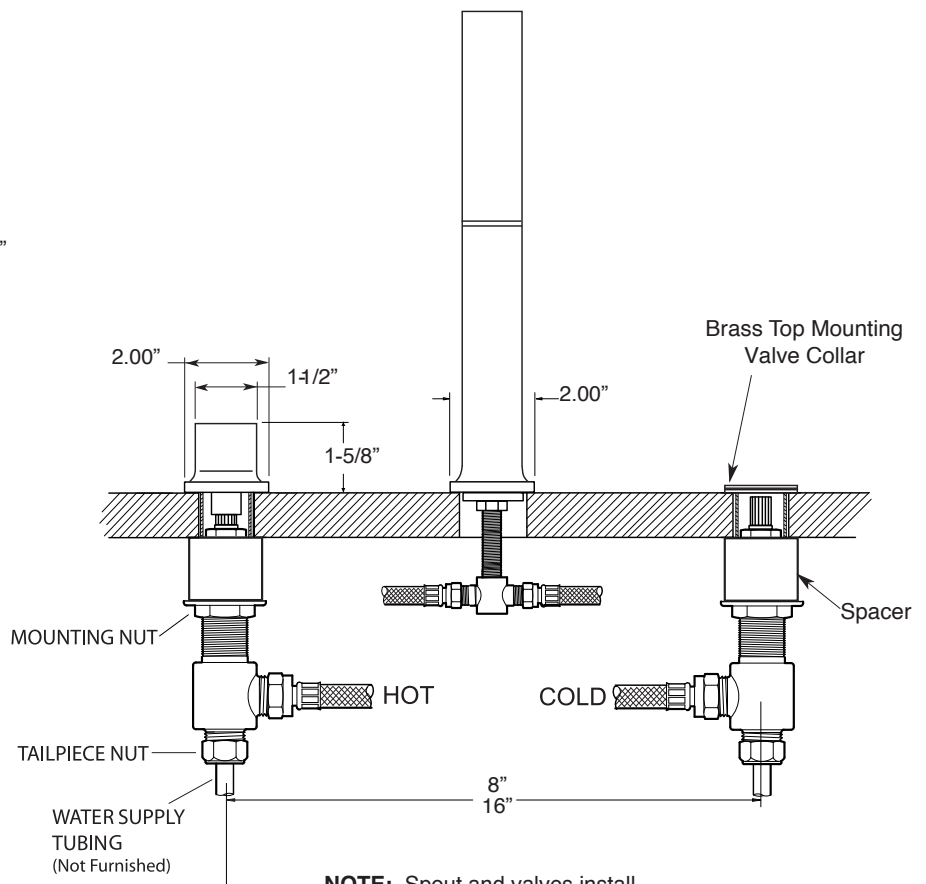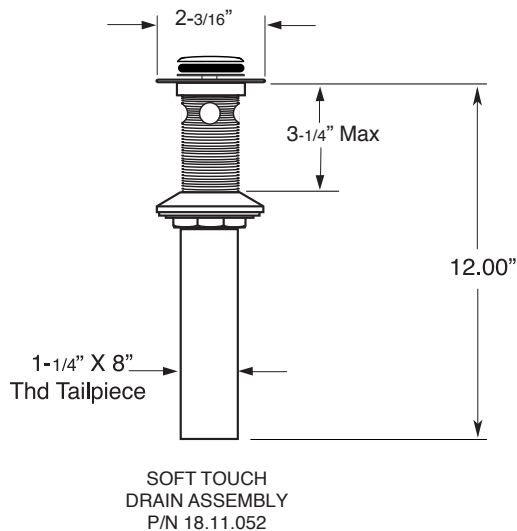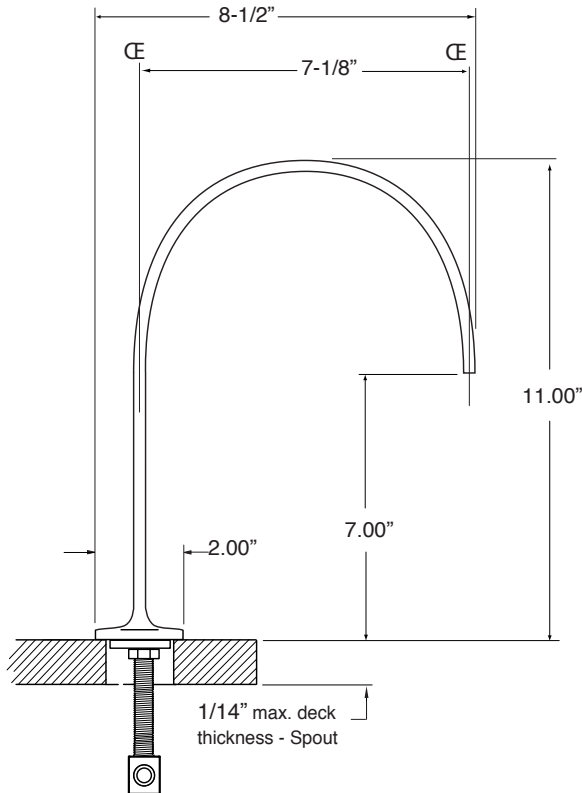

NOTE: Spout and valves install through 1-1/4" diameter holes

Note: Measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.