

**FEATURES:**

- Forged brass construction.
- Thermostatic valve cartridge: 18.30.082
- Screw driver spring check valve: (2) 18.30.181
- 14.5 GPM @ 45PSI (9.5 top exit)


Note: Separate shut-offs required to operate system.

**1/2" Thermostatic Shower Set without Volume Control with Polaris II Handle**  
**1.074996.V0**


**(1.074996.V0T Trim Only)**

Note: See installation instructions for proper depth of valve to the finished wall

**SIDE VIEW - INSTALLED**

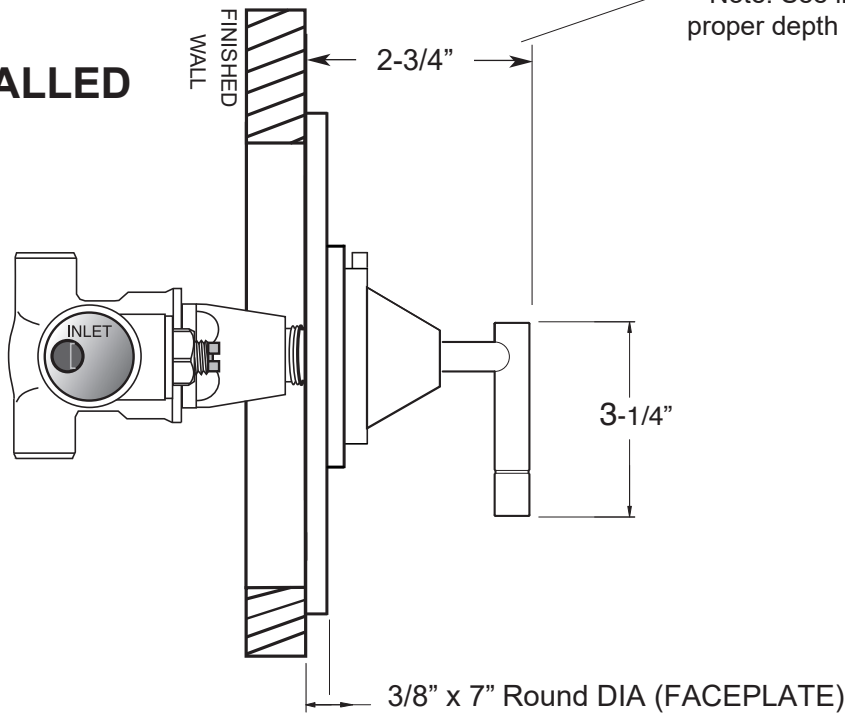

**SIDE VIEW - VALVE ONLY**

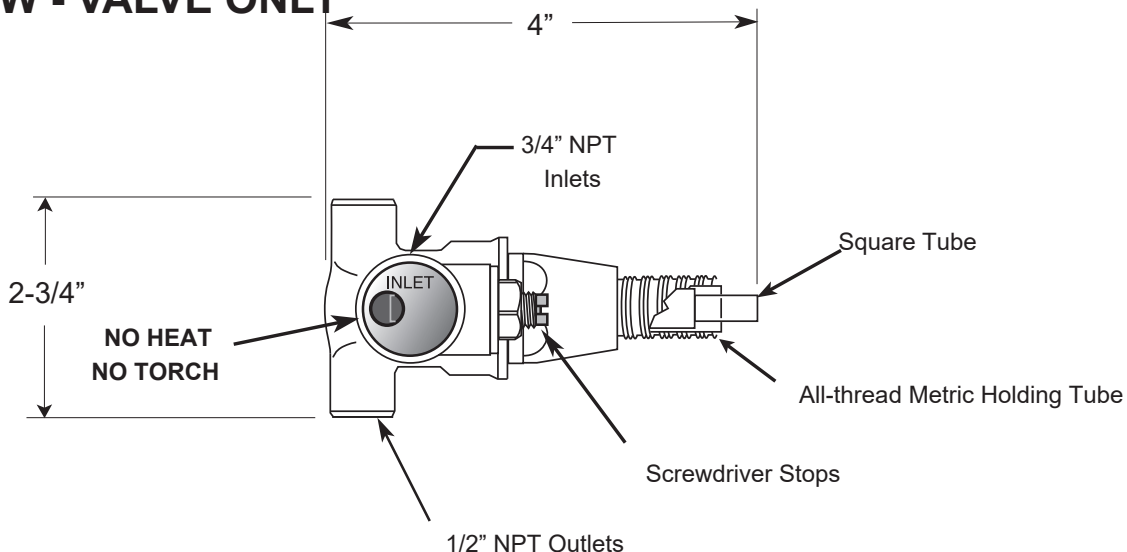

Note: Measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.